




SOLENOID VALVES

direct operated
for high pressure fluids


1/8 - 1/4

15 mm compression fittings

NC



NO



2/2
Series
262

FEATURES

- High operating pressure
- RoHS compliance
- AC/DC interchangeability of the coil possible only for NC (10,1 W/11,6 W and 17,1 W/22,6 W)
- Valves do not require a minimum operating pressure
- Large selection of seal materials providing wide chemical compatibility
- Compliance with UL and CSA standards
- The solenoid valves satisfy all relevant EU directives

GENERAL

Differential pressure
Maximum viscosity
Response time

See «SPECIFICATIONS» [1 bar =100 kPa]
65 cSt (mm²/s)
5 - 25 ms

| fluids (*) | temperature range (TS) | seal materials (*) |
|----------------------------|------------------------|--------------------|
| air, inert gas, water, oil | -25°C to +80°C | NBR (nitrile) |
| | 0°C to +60°C | UR (cast urethane) |

GENERAL

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

| | | |
|---------------------------|----------------------------|---------------------------|
| Body | Brass | Stainless steel, AISI 304 |
| Shading coil | Copper | Silver |
| Core tube | Stainless steel, AISI 305 | |
| Core and plugnut | Stainless steel, AISI 430F | |
| Springs | Stainless steel, AISI 302 | |
| Seal | NBR | |
| Disc | NBR or UR | |
| Disc holder (NO function) | PA | |

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------------------|--|
| Coil insulation class | F (AC) or H (DC) |
| Connector | Spade plug (cable Ø 6-10 mm) |
| Connector specification | ISO 4400 / EN 175301-803, form A |
| Electrical safety | IEC 335 |
| Electrical enclosure protection | Moulded IP65 (EN 60529) |
| Standard voltages | DC (=) : 24V - 48V |
| (Other voltages and 60 Hz on request) | AC (~) : 24V - 48V - 115V - 230V/50 Hz |

| operator ambient temperature range (TS) (°C) | power ratings | | | replacement coil ⁽¹⁾ | |
|---|---------------------|----------------------|----------------------|---------------------------------|-----------------------|
| | inrush ~ (VA) | holding ~ (VA) | hot/cold = (W) | ~ 230 V/50 Hz | = 24 V DC |
| -25 to +55 | 30 | 16 | 8,1 | 7,7/ 10,6 | 238213-059 238513-006 |
| | 45 | 20 | 11,1 | 12,5/18,6 | 238213-157 238513-106 |
| | 50 | 25 | 10,1 | 8,5/11,6 | 238613-059 238913-006 |
| | 70 | 40 | 17,1 | 15,1/22,6 | 238613-159 238913-106 |


⁽¹⁾ All 238 basic numbers are UL & CSA approved and marked with the UR (recognised component) & CSA logos.

OPTIONS


| | |
|---|--|
| Seals and disc (*) ⁽²⁾ (fluid temperature range) | FPM (fluoroelastomer): -15°C to +100°C (coil class F) -15°C to +120°C (coil class H) EPDM (ethylene-propylene), 0°C to +100°C CR (chloroprene), 0°C to +80°C PTFE: -15°C to +100°C (coil class F) -15°C to +120°C (coil class H) |
| Oxygen service, FPM disc and seals, see "15-DIGIT PRODUCT CODE" | |
| WRAS approval, EPDM disc and seals, see "15-DIGIT PRODUCT CODE" | |
| Magnetic latching versions, reverse polarity DC voltages, see "15-DIGIT PRODUCT CODE FOR MAGNETIC LATCHING VERSION ONLY" | |
| 15 mm compression-fitting body, supplied with nut and olive, see "15-DIGIT PRODUCT CODE" | |
| Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section) | |
| Explosionproof enclosures for use in zones 1/21-2/22, categories 2-3 to ATEX Directive 2014/34/EU (See page 4) | |

(*) Ensure that the compatibility of the fluids in contact with the materials is verified.

⁽²⁾ The minimum ambient temperature of the solenoid valve is determined by the limitations of minimum temperature indicated.

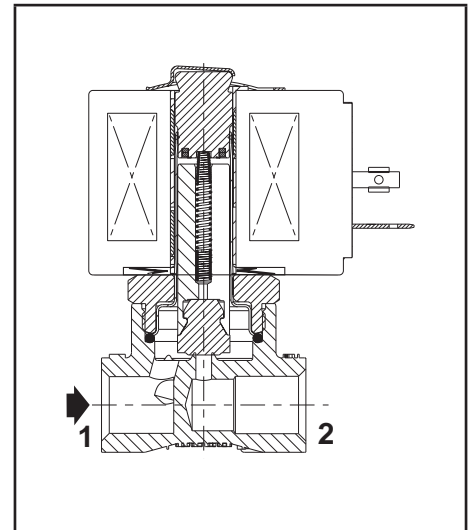

NC function

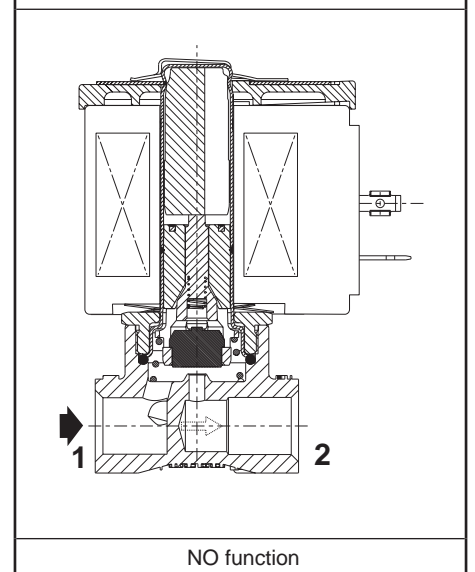

NO function

00167GB-2017/R01 Availability, design and specifications are subject to change without notice. All rights reserved.

All leaflets are available on: www.asco.com



青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.asco.store>

传真：(86-532)585-10-365
Email：sales@bechinas.com

Solenoid Valves (2/2) - 5

SPECIFICATIONS

| pipe size | orifice size (mm) | flow coefficient Kv (m ³ /h)/(l/min) | | min. | operating pressure differential (bar) max. (PS) | | | | | | power coil (W) | | thread type | dimensions / type | 15-DIGIT PRODUCT CODE | | voltage code | | | | | | | | | | | | |
|--|----------------------|--|-----------|------|--|-----|-----|-----|-----|------|----------------|--------|-------------|-------------------|------------------------------|------------------------------|---------------|---------------|---------------|---------|---------|----|---------------|----|------------------------------|----|----|----|---------------|
| | | air (*) | water (*) | | oil (*) | ~ | = | ~ | = | ~ | = | brass | | | stainless steel | 24 V/50 Hz | 48 V/50 Hz | 115 V/50 Hz | 230 V/50 Hz | 24 V/DC | 48 V/DC | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | ~ | = | ~ | = | ~ | = | | |
| WITHOUT MANUAL OPERATOR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NC - Normally closed, NBR seal and disc | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1/8 | 1,2 | 0,05 | 0,8 | 0 | 51 | 51 | 51 | 41 | 50 | 34 | 8,1 | 10,6 | G 01 | 01 | G262K001S1N00 | - | FL | FR | FT | F8 | H1 | H9 | | | | | | | |
| | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K012S1N00 | | | | | | | | | | | | | |
| | | 2,4 | 0,18 | 3 | 0 | 25 | 14 | 22 | 10 | 13 | 10 | 8,1 | 10,6 | G 01 | 01 | G262K014S1N00 | | | | | | | - | | | | | | |
| | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K015S1N00 | | | | | | | | | | | | | |
| | 3,2 | 0,3 | 5 | 0 | 12 | 8 | 12 | 6,5 | 8 | 6 | 8,1 | 10,6 | G 01 | 01 | G262K002S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K006S1N00 | | | | | | | | | | | | | |
| | | | | | 18 | 10 | 17 | 8 | 13 | 8 | 11,1 | 18,6 | G 01 | 01 | G262K016S1N00 | - | | | | | | | | | | | | | |
| | | | | | 103 | 68 | 103 | 66 | 103 | 58 | 10,1 | 11,6 | G* 02 | 02 | E262K200S1W00 ⁽²⁾ | - | | | | | | | | | | | | | |
| | | | | | 151 | 68 | 151 | 66 | 117 | 58 | 10,1 | 11,6 | G* 02 | 02 | - | E262K214S1W00 ⁽²⁾ | | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K214S1W00 ⁽²⁾ | | | | | | | | | | | | | |
| | | | | | 51 | 51 | 51 | 41 | 50 | 34 | 8,1 | 10,6 | G* 01 | 01 | E262K019S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K080S1N00 | | | | | | | | | | | | | |
| 1/4 | 1,2 | 0,05 | 0,8 | 0 | 25 | 14 | 22 | 10 | 11 | 10 | 8,1 | 10,6 | G* 01 | 01 | E262K020S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K086S1N00 | | | | | | | | | | | |
| | | | | | 34 | 19 | 24 | 13 | 18 | 13 | 11,1 | 18,6 | G* 01 | 01 | E262K021S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K086S1N00 | | | | | | | | | | |
| | 2,4 | 0,18 | 3 | 0 | 40 | 16 | 28 | 16 | 28 | 15 | 10,1 | 11,6 | G* 02 | 02 | E262K108S1N00 | E262K182S1N00 | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K182S1N00 | | | | | | | | | | | |
| | | | | | 49 | 41 | 28 | 28 | 28 | 27 | 17,1 | 22,6 | G* 02 | 02 | E262K109S1N00 | E262K183S1N00 | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K183S1N00 | | | | | | | | | | |
| | 3,2 | 0,3 | 5 | 0 | 12 | 8 | 12 | 6,5 | 6 | 5,5 | 8,1 | 10,6 | G* 01 | 01 | E262K022S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K007S1N00 | | | | | | | | | | | |
| | | | | | 18 | 10 | 17 | 8 | 10 | 7,5 | 11,1 | 18,6 | G* 01 | 01 | E262K023S1N00 | - | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K007S1N00 | | | | | | | | | | |
| 4 | 0,45 | 7,5 | 0 | 23 | 7,5 | 20 | 7 | 14 | 6,5 | 10,1 | 11,6 | G* 02 | 02 | E262K232S1N00 | E262K184S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K184S1N00 | | | | | | | | | | | | |
| | | | | 34 | 17 | 26 | 17 | 24 | 15 | 17,1 | 22,6 | G* 02 | 02 | E262K110S1N00 | E262K185S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K185S1N00 | | | | | | | | | | | |
| 5,6 | 0,63 | 10,5 | 0 | 14 | 3,5 | 13 | 3,5 | 10 | 3,5 | 10,1 | 11,6 | G* 02 | 02 | E262K202S1N00 | E262K220S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K220S1N00 | | | | | | | | | | | | |
| | | | | 20 | 7,5 | 14 | 7,5 | 14 | 7,5 | 17,1 | 22,6 | G* 02 | 02 | E262K112S1N00 | E262K187S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K187S1N00 | | | | | | | | | | | |
| 7,1 | 0,76 | 12,7 | 0 | 6,5 | 2 | 6,5 | 2 | 6,5 | 2 | 10,1 | 11,6 | G* 02 | 02 | E262K208S1N00 | E262K226S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K226S1N00 | | | | | | | | | | | | |
| | | | | 8,5 | 4 | 8,5 | 4 | 8,5 | 4 | 17,1 | 22,6 | G* 02 | 02 | E262K114S1N00 | E262K188S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K188S1N00 | | | | | | | | | | | |
| 7,1 | 0,76 | 12,7 | 0 | 3,5 | 2 | 3,5 | 2 | 2,5 | 1,9 | 8,1 | 10,6 | G* 01 | 01 | E262K013S1N00 | - | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K036S1N00 | | | | | | | | | | | | |
| | | | | 2 | 1,6 | 2 | 1,5 | 2 | 1,3 | 8,1 | 10,6 | G* 01 | 01 | E262K090S1N00 | - | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 01 | 01 | - | 8262K038S1N00 | | | | | | | | | | | |
| 7,1 | 0,76 | 12,7 | 0 | 4 | 1,5 | 5 | 1,5 | 4 | 1,3 | 10,1 | 11,6 | G* 02 | 02 | E262K210S1N00 | E262K189S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K189S1N00 | | | | | | | | | | | | |
| | | | | 6 | 3 | 6 | 3 | 6 | 3 | 17,1 | 22,6 | G* 02 | 02 | E262K212S1N00 | E262K230S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K230S1N00 | | | | | | | | | | | |
| NO - Normally open, NBR seal and disc | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1/8 | 1,2 | 0,05 | 0,8 | 0 | 79 | 44 | 62 | 33 | 55 | 22 | 10,1 | 11,6 | G 02 | 02 | G262K155S1W00 ⁽²⁾ | G262K168S1W00 ⁽²⁾ | FL | FR | FT | F8 | H1 | H9 | | | | | | | |
| | | | | | | | | | | | | | | | | NPT 02 | | | | | | | 02 | - | 8262K168S1W00 ⁽²⁾ | | | | |
| | | | | | | 51 | 44 | 51 | 38 | 51 | 27 | 10,1 | 11,6 | G 02 | 02 | G262K156S1N00 | | | | | | | G262K169S1N00 | | | | | | |
| | | | | | | | | | | | | NPT 02 | 02 | - | 8262K169S1N00 | | | | | | | | | | | | | | |
| | 2,4 | 0,18 | 3 | 0 | 18 | 11 | 15 | 9 | 12 | 6,5 | 10,1 | 11,6 | G 02 | 02 | G262K128S1N00 | G262K236S1N00 | | | | | | | | | | | | | |
| | | | | | | | | | | | | NPT 02 | 02 | - | 8262K236S1N00 | | | | | | | | | | | | | | |
| | 3,2 | 0,3 | 5 | 0 | 11 | 6,5 | 10 | 6,5 | 8,5 | 4,5 | 10,1 | 11,6 | G 02 | 02 | G262K129S1N00 | G262K237S1N00 | | | | | | | | | | | | | |
| | | | | | | | | | | | | NPT 02 | 02 | - | 8262K237S1N00 | | | | | | | | | | | | | | |
| 1/4 | 1,2 | 0,05 | 0,8 | 0 | 79 | 44 | 62 | 33 | 55 | 22 | 10,1 | 11,6 | G* 02 | 02 | E262K161S1W00 ⁽²⁾ | E262K199S1W00 ⁽²⁾ | | | | | | | FL | FR | FT | F8 | H1 | H9 | |
| | | | | | | | | | | | | | | | | NPT 02 | | | | | | | | | | | | | 02 |
| | | | | | | 51 | 44 | 51 | 38 | 51 | 27 | 10,1 | 11,6 | G* 02 | 02 | E262K260S1N00 | | | | | | | | | | | | | E262K130S1N00 |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K130S1N00 | | | | | | | | | | | | | |
| | | 2,4 | 0,18 | 3 | 0 | 18 | 11 | 15 | 9 | 12 | 6,5 | 10,1 | 11,6 | G* 02 | 02 | E262K261S1N00 | E262K134S1N00 | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K134S1N00 | | | | | | | | | | | | | |
| | | 3,2 | 0,3 | 5 | 0 | 11 | 6,5 | 10 | 6,5 | 8,5 | 4,5 | 10,1 | 11,6 | G* 02 | 02 | E262K262S1N00 | E262K138S1N00 | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K138S1N00 | | | | | | | | | | | | | |
| | | 4 | 0,47 | 7,8 | 0 | 6 | 4 | 6 | 3,5 | 4,5 | 3 | 10,1 | 11,6 | G* 02 | 02 | E262K263S1N00 | E262K142S1N00 | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K142S1N00 | | | | | | | | | | | | | |
| | | 5,6 | 0,72 | 12 | 0 | 3 | 2 | 3 | 1,7 | 2,5 | 1,7 | 10,1 | 11,6 | G* 02 | 02 | E262K264S1N00 | E262K148S1N00 | | | | | | | | | | | | |
| | | | | | | | | | | | | | NPT 02 | 02 | - | 8262K148S1N00 | | | | | | | | | | | | | |
| | 7,1 | 0,83 | 13,8 | 0 | 2 | 1,3 | 2 | 1,1 | 2 | 1,1 | 10,1 | 11,6 | G* 02 | 02 | E262K265S1N00 | E262K152S1N00 | | | | | | | | | | | | | |
| | | | | | | | | | | | | NPT 02 | 02 | - | 8262K152S1N00 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | NPT 02 | 02 | - | 8262K230S1N01 | | | | | | | | | | | | | | |

(1) For dimensions, see drawing(s) for each construction type on the following page(s).
 (*) Ensure that the compatibility of the fluids in contact with the materials is verified.

(2) UR disc only, fluid temperature 0°C to +60°C, no other elastomer can be used.

00167GB-2017/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

All leaflets are available on: www.asco.com

SPECIFICATIONS

| pipe size | orifice size (mm) | flow coefficient Kv (m ³ /h)(l/min) | | operating pressure differential (bar) | | | | | | power coil (W) | | thread type | dimensions / type (1) | 15-DIGIT PRODUCT CODE | | | | | | | | | | | | | | | |
|--|----------------------|--|------|---------------------------------------|-----|-----------|-----|---------|-----|-------------------|------|-------------|-----------------------|-----------------------|-----------------|--------------|------------|-------------|-------------|---------|---------|---------------|---------------|--|--|--|--|--|--|
| | | | | max. (PS) | | | | | | | | | | brass | stainless steel | voltage code | | | | | | | | | | | | | |
| | | | | air (*) | | water (*) | | oil (*) | | | | | | | | 24 V/50 Hz | 48 V/50 Hz | 115 V/50 Hz | 230 V/50 Hz | 24 V/DC | 48 V/DC | | | | | | | | |
| WITH MAINTAINED MANUAL OPERATOR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NC - Normally closed, NBR seal and disc | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1/4 | 2,4 | 0,18 | 3 | 0 | 40 | 16 | 28 | 16 | 28 | 15 | 10,1 | 11,6 | G* 02 | E262K108S1N01 | E262K182S1N01 | FL | FR | FT | F8 | H1 | H9 | | | | | | | | |
| | | | | | 49 | 41 | 28 | 28 | 28 | 27 | 17,1 | 22,6 | NPT 02 | - | 8262K182S1N01 | | | | | | | | | | | | | | |
| | 3,2 | 0,3 | 5 | 0 | 23 | 7,5 | 20 | 7 | 14 | 6,5 | 10,1 | 11,6 | G* 02 | E262K232S1N01 | E262K184S1N01 | | | | | | | | | | | | | | |
| | | | | | 34 | 17 | 26 | 17 | 24 | 15 | 17,1 | 22,6 | NPT 02 | - | 8262K184S1N01 | | | | | | | | | | | | | | |
| | 4 | 0,45 | 7,5 | 0 | 14 | 3,5 | 13 | 3,5 | 10 | 3,5 | 10,1 | 11,6 | G* 02 | E262K202S1N01 | E262K220S1N01 | | | | | | | | | | | | | | |
| | | | | | 20 | 7,5 | 14 | 7,5 | 14 | 7,5 | 17,1 | 22,6 | NPT 02 | - | 8262K220S1N01 | | | | | | | | | | | | | | |
| | 5,6 | 0,63 | 10,5 | 0 | 6,5 | 2 | 6,5 | 2 | 6,5 | 2 | 10,1 | 11,6 | G* 02 | E262K208S1N01 | E262K226S1N01 | | | | | | | | | | | | | | |
| | | | | | 8,5 | 4 | 8,5 | 4 | 8,5 | 4 | 17,1 | 22,6 | NPT 02 | - | 8262K226S1N01 | | | | | | | | | | | | | | |
| | 7,1 | 0,76 | 12,7 | 0 | 4 | 1,5 | 5 | 1,5 | 4 | 1,3 | 10,1 | 11,6 | G* 02 | E262K210S1N01 | E262K189S1N01 | | | | | | | | | | | | | | |
| | | | | | 6 | 3 | 6 | 3 | 6 | 3 | 17,1 | 22,6 | NPT 02 | - | 8262K189S1N01 | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | G* 02 | | | | | | | E262K212S1N01 | E262K230S1N01 | | | | | | |
| | | | | | | | | | | | | | | | NPT 02 | | | | | | | - | 8262K230S1N01 | | | | | | |

(1) For dimensions, see drawing(s) for each construction type on the following page(s).

(2) UR disc only, fluid temperature 0°C to +60°C, no other elastomer can be used.

(*) Ensure that the compatibility of the fluids in contact with the materials is verified.

15-DIGIT PRODUCT CODE

- **262** **K** **001** **S1** **N00** **H1**

Thread connection

- G** = ISO 228/1 (1/8)
- E** = ISO 228/1 & ISO 7/1 (combination thread, G*)
- 8** = NPT (SAE 71051)
- H** = 15 mm compression fittings ⁽²⁾

Product series
262

Revision letter
K = Initial release

Valves version

Electrical interface & explosion proof options

- S1** = With spade plug connector
- FN** = Aluminium enclosure, 1/2 NPT conduit, IECEX/ATEX
II 2G/D Ex d IIC T6..T4 Gb / Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [NF](#) prefix)⁽³⁾
- FT** = Aluminium enclosure, 20 mm conduit, IECEX/ATEX
equivalent to NFET prefix)⁽³⁾
- FS** = AISI 316L enclosure, 1/2 NPT conduit, IECEX/ATEX
II 2G/D Ex d IIC T6..T4 Gb / Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [WSNF](#) prefix)⁽³⁾
- FU** = AISI 316L enclosure, 20 mm conduit, IECEX/ATEX
II 2G/D Ex d IIC T6..T4 Gb / Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [WSNFET](#) prefix)⁽³⁾
- MV** = Steel enclosure, M20 cable gland, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [EM](#) prefix)⁽³⁾
- MT** = Steel enclosure, 20 mm conduit, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db, zone 1-21 (equivalent to [EMET](#) prefix)⁽³⁾
- MN** = Steel enclosure, 1/2 NPT conduit, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [EMT](#) prefix)⁽³⁾
- MW** = AISI 316 enclosure, M20 cable gland, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [WSEM](#) prefix)⁽³⁾
- MU** = AISI 316 enclosure, 20 mm conduit, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [WSEMET](#) prefix)⁽³⁾
- MS** = AISI 316 enclosure, 1/2 NPT conduit, IECEX/ATEX
II 2G Ex e mb IIC Gb T3, II2D Ex tb IIIC Db IP66/IP67, zone 1-21 (equivalent to [WSEMT](#) prefix)⁽³⁾
- A7** = Moulded enclosure, epoxy encapsulated, integrated cable, IECEX/ATEX
II2G Ex mb IIC Gb T3(-)/T4(=), II2D Ex mb IIIC Db IP67, zone 1-21 (equivalent to [PV](#) prefix)⁽³⁾
- SG** = Moulded coil with connector, epoxy encapsulated, ATEX
II 3 D Ex tc IIIC T115°C Dc IP65X, zone 22 (equivalent to [SG](#) prefix)⁽³⁾

Voltage - class

- FL** = 24 V / 50 Hz - class F
- FR** = 48 V / 50 Hz - class F
- FT** = 115 V / 50 Hz - class F
- F8** = 230 V / 50 Hz - class F
- H1** = 24 V DC - class H
- H9** = 48 V DC - class H

Options

Without manual operator

- N00** = NBR disc and seals
- V00** = FPM disc and seals
- VN0** = FPM disc and seals for Oxygen service
- EM0** = EPDM disc and seals, WRAS approved ⁽²⁾
- E00** = EPDM disc and seals
- J00** = CR disc and seals
- T00** = PTFE disc and seals ⁽¹⁾

⁽¹⁾ (Max. operating pressure limited to 75% of standard value)

With maintained manual operator

- N01** = NBR disc and seals
- V01** = FPM disc and seals
- VN1** = FPM disc and seals for Oxygen service
- E01** = EPDM disc and seals
- J01** = CR disc and seals

⁽²⁾ Check the online configurator for available versions on: www.asco.com

⁽³⁾ Search prefix in asco.com to get detailed technical information.

Please note that the valve pressure ratings with some of the ATEX enclosures will be reduced.

To obtain the correct pressure rating please check the landing pages of the ["2-Way Solenoid Valve DIN Configurator"](#).

SPARE PARTS KITS CODE (*)



| | AC (-) | | | | | | | | | | DC (=) | | | | | | | | | |
|----------------------------------|---------|-----|--------------|------|--------------|-----|------|----------|-----|---------|--------|--------------|------|--------------|-----|------|----------|-----|--|--|
| | NBR | FPM | FPM (oxygen) | EPDM | EPDM (+WRAS) | CR | PTFE | NBR + UR | | NBR | FPM | FPM (oxygen) | EPDM | EPDM (+WRAS) | CR | PTFE | NBR + UR | | | |
| E262K013/019/020/021/022/023/090 | M200001 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200005 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K108/109/110/112/114 | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K130 | M200017 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K134 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K138/142/148/152 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200034 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K161 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| E262K182/183/184/185/187/188/189 | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | | |
| E262K200 | M200007 | - | - | - | - | - | - | - | W00 | M200007 | - | - | - | - | - | - | - | W00 | | |
| E262K202/208/210/212 | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K214 | M200008 | - | - | - | - | - | - | - | W00 | M200008 | - | - | - | - | - | - | - | W00 | | |
| E262K220/226/230 | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | | |
| E262K232 | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200007 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K260 | M200015 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200031 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| E262K261 | M200016 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200031 | - | - | - | - | - | - | - | W00 | | |
| E262K262/263/264/265 | M200016 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200032 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K001/002/014/016 | M200001 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200005 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K128 | M200016 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200031 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K129 | M200016 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200032 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K155 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| G262K156 | M200015 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200031 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K168 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| G262K169 | M200017 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K199 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| G262K236 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| G262K237 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200034 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K006/007/012/015/036/038 | M200003 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200005 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K080/086 | M200003 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200005 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K130 | M200017 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K134 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K138/142/148/152 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200034 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K168 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| 8262K169 | M200017 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K182/183/184/185/187/188/189 | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | | |
| 8262K199 | M200021 | - | - | - | - | - | - | - | W00 | - | - | - | - | - | - | - | - | | | |
| 8262K220/226/230 | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | M200008 | N00 | V00 | VN0 | E00 | EM0 | J00 | - | - | | |
| 8262K236 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200033 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |
| 8262K237 | M200018 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | M200034 | N00 | V00 | VN0 | E00 | EM0 | J00 | T00 | - | | |

(*) Ensure that the compatibility of the fluids in contact with the materials is verified.

00167GB-2017/R01 Availability, design and specifications are subject to change without notice. All rights reserved.

All leaflets are available on: www.asco.com



青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.asco.store>

Solenoid Valves (2/2) - 9
传真：(86-532)585-10-365
Email：sales@bechinas.com

MAGNETIC LATCHING VERSION

| | | |
|------------|------------------------|--------------------|
| fluids (*) | temperature range (TS) | seal materials (*) |
| water | 0°C to +85°C | EPDM |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------------|-----------------------------|
| Coil insulation class | F (DC) |
| Standard voltages | DC (=) : 3V - 6V - 9V - 12V |

| operator ambient temperature range (TS) (°C) | power ratings | | replacement coil ⁽¹⁾ | |
|---|---------------|-----------------|---------------------------------|------------|
| | hot/cold = | | = | |
| | (W) | | | |
| | 640 | 641/642/643/644 | 6 V DC | 12 V DC |
| 0 to +40 | 2,5 | - | 400927-003 | 400927-005 |
| | - | 6 | 400927-007 | 400927-014 |

⁽¹⁾ All coils 400 series are not UL & CSA approved.



SPECIFICATIONS


| pipe size | orifice size (mm) | flow coefficient Kv (m³/h) (l/min) | operating pressure differential (bar) | | power coil (W) | thread type | dimensions / type ⁽²⁾ | 15-DIGIT PRODUCT CODE | | | | | | | | | | |
|----------------------------------|----------------------|--|---------------------------------------|---|----------------|-------------|-------------------------------------|-----------------------|----------------------|--------|--------|---------|---------|----------------------|--|--|--|--|
| | | | max. (PS) | | | | | brass | voltage code | | | | | | | | | |
| | | | water (*) | | | | | | 3 V/DC | 6 V/DC | 9 V/DC | 12 V/DC | 24 V/DC | | | | | |
| WITHOUT MANUAL OPERATOR | | | | | | | | | | | | | | | | | | |
| EPDM seal and disc | | | | | | | | | | | | | | | | | | |
| 15 mm compression fittings | 1,2 | 0,05 | 0,8 | 0 | 10 | 2,5 | H | 03 | H262K640S1EM0 | | | | | | | | | |
| | 2,0 | 0,15 | 2,5 | 0 | 10 | 6 | H | 03 | H262K641S1EM0 | | | | | | | | | |
| | 3,2 | 0,30 | 5,0 | 0 | 3 | 6 | H | 03 | CD | E7 | E8 | F3 | F1 | | | | | |
| | 4 | 0,45 | 7,5 | 0 | 2 | 6 | H | 03 | | | | | | H262K642S1EM0 | | | | |
| | 6,7 | 0,82 | 13,7 | 0 | 0,7 | 6 | H | 03 | | | | | | H262K643S1EM0 | | | | |
| | | | | | | | | H262K644S1EM0 | | | | | | | | | | |

⁽²⁾ For dimensions, see drawing(s) for each construction type on the following page(s).

(*) Ensure that the compatibility of the fluids in contact with the materials is verified.


15-DIGIT PRODUCT CODE FOR MAGNETIC LATCHING VERSION ONLY

[Configurator - CAD Files](#)

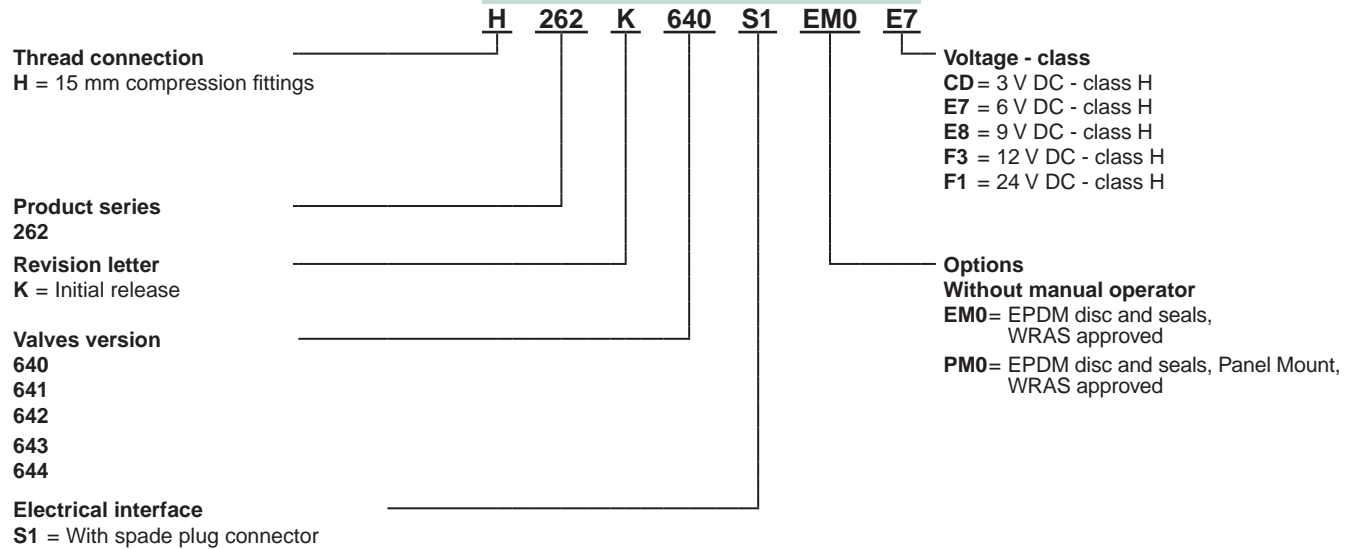

SPARE PARTS KITS CODE (*)

| | | DC (=) | |
|--|--|---------------|-----|
| | | EPDM (+ WRAS) | |
| | H262K640 / H262K641 H262K642 / H262K643 H262K644 | M200001 | EM0 |

| | | ACCESSORIES CODE |
|---|--|------------------|
|  | Mounting bracket Steel version (AISI 1010 / 1.1121) | M200094A00 |
| | Mounting bracket Stainless steel version (AISI 304 / 1.4301) | M200095A00 |

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation
- Solenoid valves have 2 mounting holes in body
- Thread connection "E" applicable for 1/4 have standard thread according to ISO 228/1 and ISO 7/1. Thread connection "G" applicable for 1/8, have standard thread according to ISO 228/1
- Thread connection "8" have standard thread = NPT (SAE 71051)
- Thread connection "H" have 1/2" male 'G' thread according to BS 2779 plus cap-nut and olive
- Installation/maintenance instructions are included with each valve

DIMENSIONS (mm), WEIGHT (kg)

[Configurator - CAD Files](#)




TYPE 01

Electrical interface "S1"
Epoxy moulded
IEC 335 / ISO 4400
IP65

1/8, power coil 8,1 W / 10,6 W and 11,1 W / 18,6 W

1/4, power coil 8,1 W / 10,6 W and 11,1 W / 18,6 W

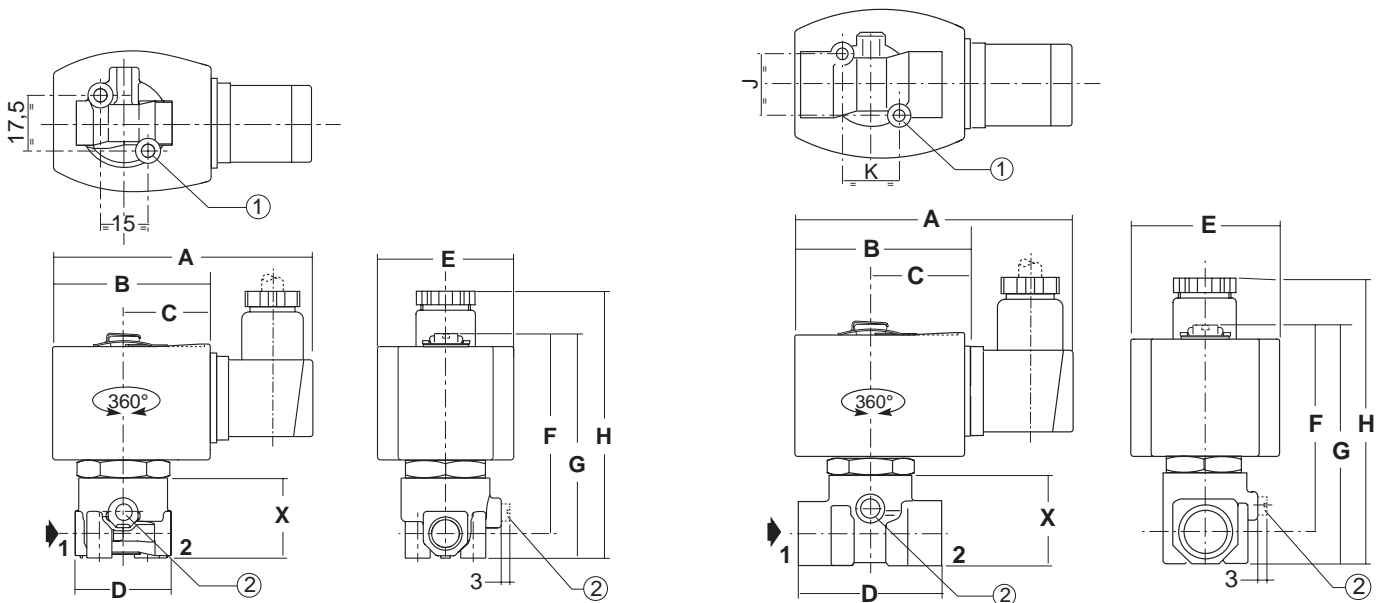

| type | pipe size | A | B | C | D | E | F | G | H | X | weight ⁽¹⁾ |
|------|-----------|----|----|----|----|----|----|----|----|----|-----------------------|
| 01 | 1/8 | 88 | 51 | 30 | 30 | 43 | 62 | 71 | 88 | 26 | 0,30 |
| | 1/4 | 88 | 51 | 30 | 40 | 43 | 65 | 75 | 92 | 30 | 0,42 |

⁽¹⁾ Incl. coil(s) and connector(s).

- ① 2 mounting holes:
M5 dia., depth 6,5 mm (1/8)
M5 dia., depth 7,5 mm (1/4)
- ② Manual operator location

DIMENSIONS (mm), WEIGHT (kg)


[Configurator - CAD Files](#)



TYPE 02
Electrical interface "S1"
Epoxy moulded
IEC 335 / ISO 4400
IP65

NC: 1/4, power coil 10,1 W / 11,6 W and 17,1 W / 22,6 W

NO: 1/8-1/4, power coil 10,1 W / 11,6 W

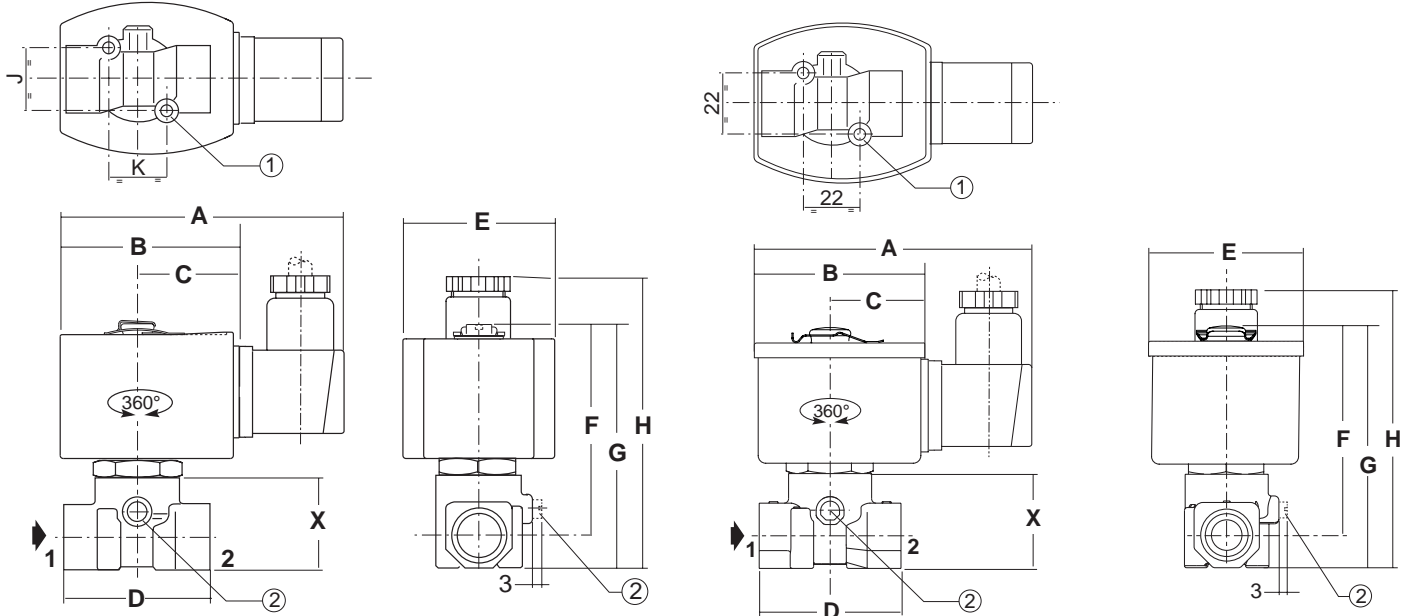

| type | pipe size | A | B | C | D | E | F | G | H | J | K | X | weight ⁽¹⁾ |
|------|-----------|----|----|----|----|----|----|----|----|------|----|----|-----------------------|
| 02 | 1/8 (NO) | 96 | 59 | 34 | 30 | 52 | 67 | 75 | 88 | 17,5 | 15 | 26 | 0,50 |
| | 1/4 (NC) | 95 | 57 | 33 | 40 | 50 | 69 | 78 | 96 | 22 | 22 | 30 | 0,60 |
| | 1/4 (NO) | 96 | 59 | 34 | 40 | 52 | 69 | 78 | 96 | 22 | 22 | 30 | 0,62 |



⁽¹⁾ Incl. coil(s) and connector(s).

- ① 2 mounting holes:
M5 dia., depth 7,5 mm (1/4)
- ② Manual operator location.



TYPE 03
Electrical interface "S1"
Epoxy moulded
IEC 335 / ISO 4400
IP65


Magnetic latching coil 2,5 W / 6 W

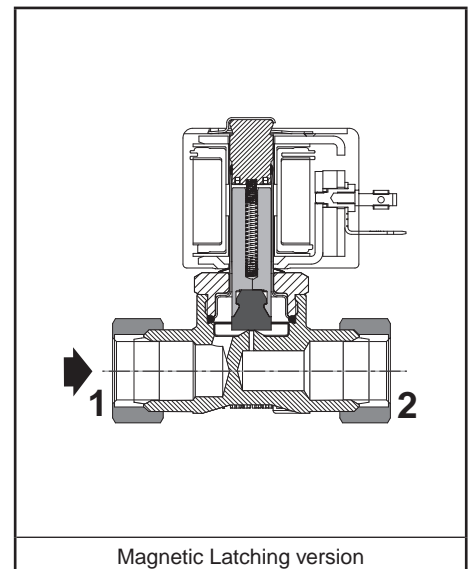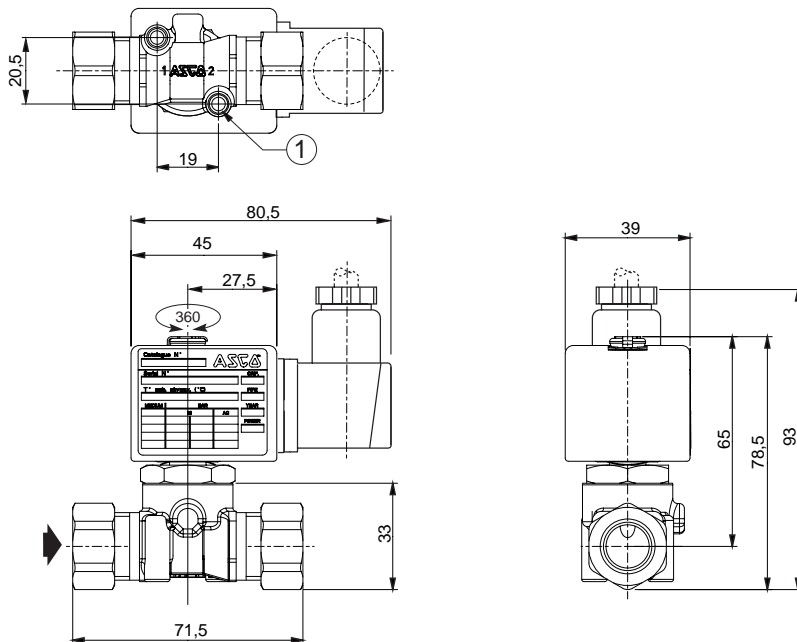

- ① 2 mounting holes:
190-24 UNC-2B, depth 6 mm

| |
|------------------------------|
| weight ⁽¹⁾ |
| 0,45 |

⁽¹⁾ Incl. coil(s) and connector(s).



Mounting bracket
Steel or stainless steel

M200094A00 / M200095A00

