
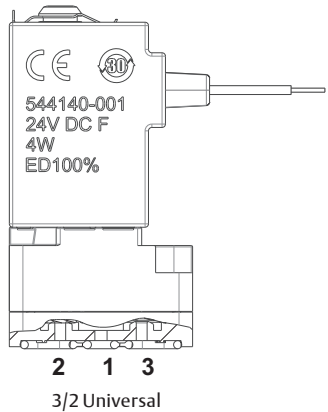
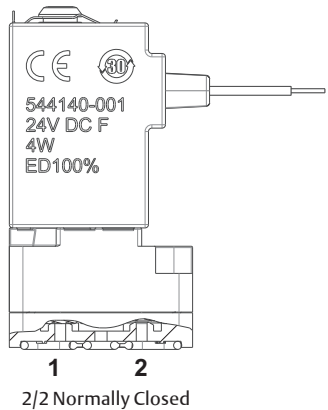



ASCO™ MINIATURE SOLENOID VALVES

ROCKER MECHANISM, FLUID ISOLATION VALVES

SERIES
062

- Rocker isolation valves are designed for use with neutral or highly aggressive liquids in analytical instruments
- Special rocker mechanism, combined with a separating diaphragm, prevents heat transfer to the fluid and eliminates the sticking effect of the valve seat
- Excellent self-draining capability and easy-to-flush low-volume internal cavity make these valves ideal in applications where cross-contamination must be minimized
- Removable and rotatable electrical coils allow for easy installation and worry-free maintenance
- Meets all relevant CE directives, and is RoHS compliant
- Typical applications include:
 - In-Vitro Diagnostics
 - Hematology
 - DNA Sequencing
 - Industrial Liquid Analyzers



Fluids *	Temperature Range	Seal Materials *
Liquids or Gases	-10°C to +50°C (14°F to 122°F)	EPDM (ethylene-propylene) FKM

* Ensure that the compatibility of the materials in contact with the fluids is verified.


General Valve Information	
Body	PPS
Seals	EPDM, FKM
Response Time	< 20 ms
Ambient Temperature Range	-10°C to +60°C (14°F to 140°F)
Internal Volume	67 µl

Electrical Characteristics	
Coil Insulation Class	F (155°C [311°F])
Duty Cycle	100%
Connector	Lead Wires, L=500mm (19.7in)
Connector Specification	24 AWG
Electrical Safety	IEC 335
Electrical Enclosure Protection	IP65 (EN 60529)
Standard Voltages	12 VDC - 24V DC (-5% / +10%)

01102GB-2021/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

Specifications								
Connection	Orifice Size	Flow Coefficient		Operating Pressure bar (psi)			Power Rating	Catalog Number
				Min.	Max.			
	mm (in)	Kv (m³/h)	Cv			gases	liquids	
2/2 NC - Normally closed								
Pad mount	1.6 (0.063)	0.03	0.035	-0.53 (-7.69)	2.0 (29)	2.0 (29)	4.0	R062A210L0X00FX
Barb fitting	1.6 (0.063)	0.03	0.035	-0.53 (-7.69)	2.0 (29)	2.0 (29)	4.0	6062A210L0X00FX
3/2 U - Universal								
Pad mount	1.6 (0.063)	0.03	0.035	-0.53 (-7.69)	2.0 (29)	2.0 (29)	4.0	R062A310L0X00FX
Barb fitting	1.6 (0.063)	0.03	0.035	-0.53 (-7.69)	2.0 (29)	2.0 (29)	4.0	6062A310L0X00FX

How to Order

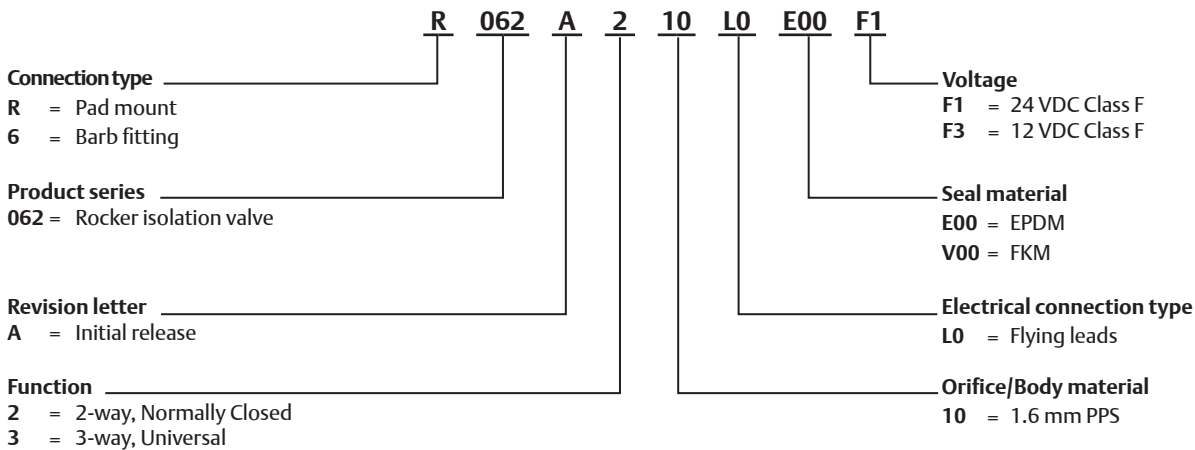

Installation

- The solenoid valves can be mounted in any position without affecting operation
- Hose barb connection of flexible soft tubing Ø 1.6mm to 2mm ID


ASCO™ MINIATURE SOLENOID VALVES

ROCKER MECHANISM, FLUID ISOLATION VALVES


Series
062

Dimensions: mm (inches)

2-way and 3-way Pad Mount

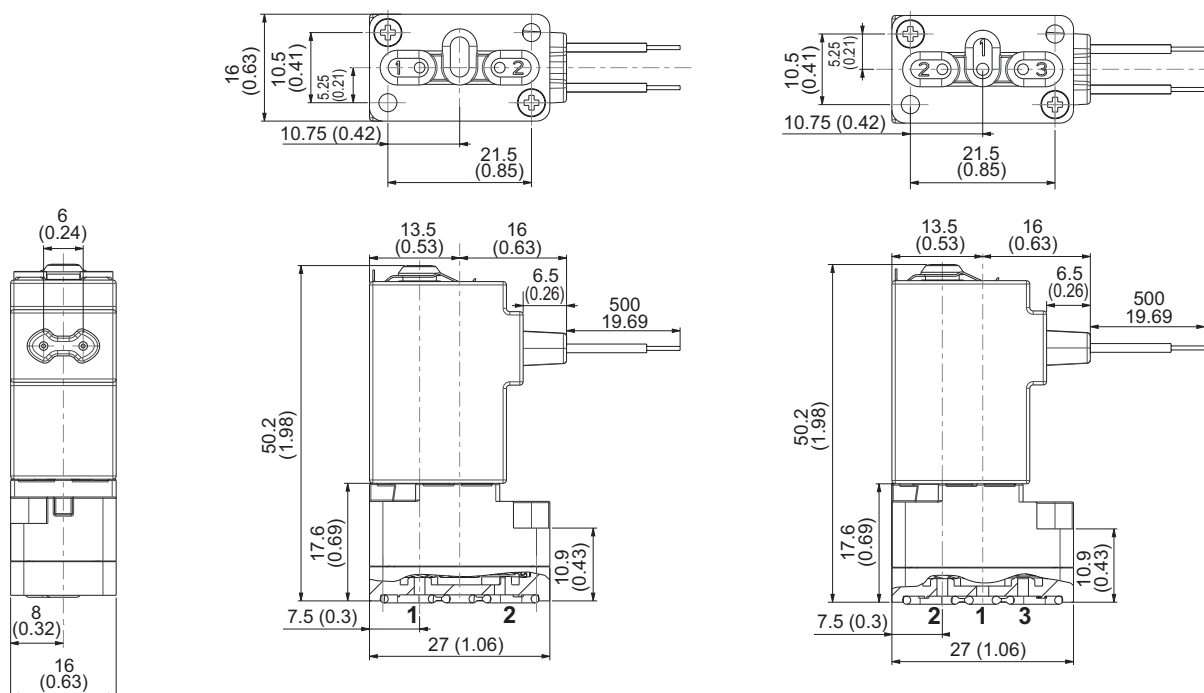

Subbase interface dimensions

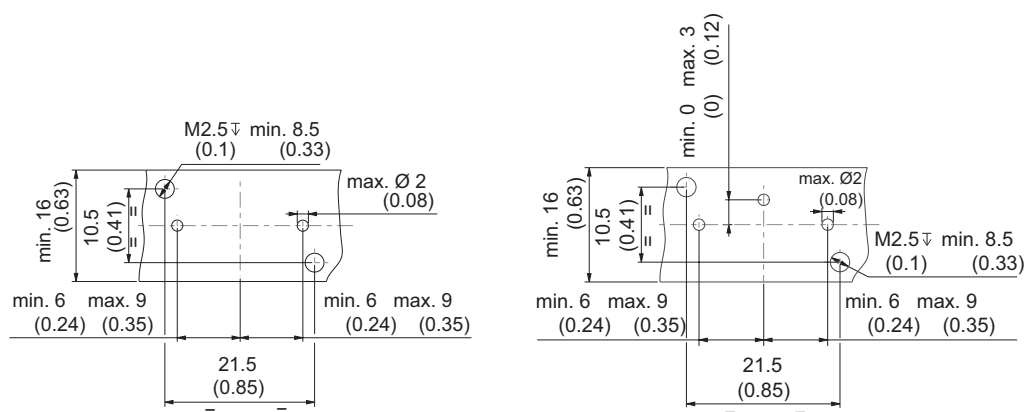

Dimensions: mm (inches)

2-way and 3-way Barb Fitting

