


DIRECT OPERATED SOLENOID PILOT VALVES

Product Index

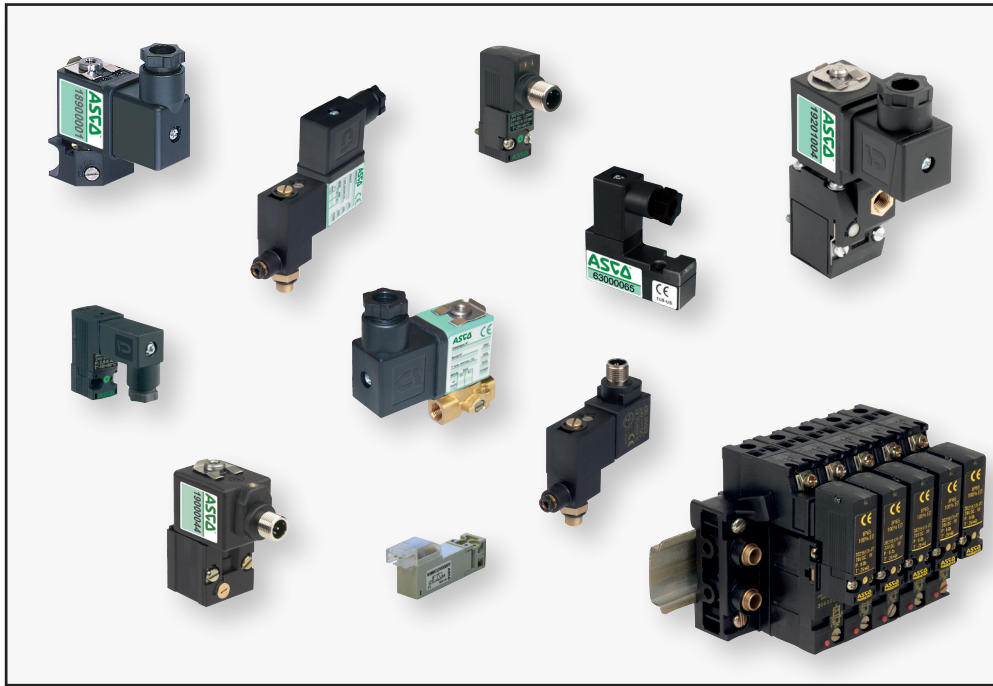

ports/positions	Function			pipe connections					max. pressure (bar)	flow at 6 bar l/min (ANR)	Kv coef.	M12 connection	Type	Illustration	Series	Page	
				▮ - instant fittings O.D. (mm) ▮ - internal thread (ØG) ▮ - external thread (ØG) ⊥ - pad mount ⊥ - pad mount, pneumatic-electric ⊥ - pad mount, CNOMO size 15 ⊥ - pad mount, CNOMO size 30													
	NC	NO	U	4	6	M3	M5	1/8									1/4
Solenoid pilot valves																	
3/2	●	●				▮			⊥	8	8	0,12		Micro 10		188	1
3/2	●	●					▮		⊥	10	13-44	0,20-0,65		Micro 10 high flow		188	5
2/2	●	●							⊥	10	11-39	0,11-0,5	M12			302	9
3/2	●	●	●						⊥	10	11-39	0,11-0,5	M12			302	15
2/2	●	●							⊥	8	6-7	0,086-0,12		Piezotronic		630	21
3/2	●	●		▮					⊥	8	6-7	0,086-0,12		Piezotronic		630	21
3/2	●	●	●						⊥	15	-	0,8-2,6				356	23
3/2	●								⊥	10	34	0,5	M12	Banjo		189	25
3/2	●	●		▮	▮				⊥	10	50	0,6-0,7	M12			189	27
3/2	●			▮	▮				⊥	10	70	1	M12			190	29
3/2	●	●	●	▮	▮				⊥	16	112	1,5-1,6	M12			192	31

01817GB-2017/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

All leaflets are available on: www.asco.com



青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.asco.store>

传真：(86-532)585-10-365
Email：sales@bechinas.com

