




COIL Flying leads

Z535

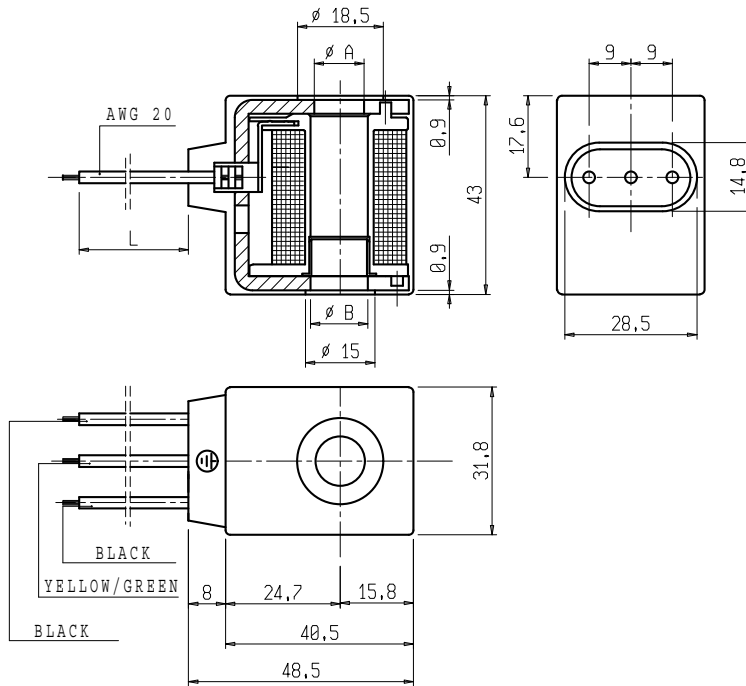

► GENERAL FEATURES

Complying with 2014/35/EU (LVD) and 2014/30/EU (EMC) directives.
Product in accordance with the RoHS 2 directive.
100% inspected.

► ELECTRIC CONNECTIONS

- N° 3 wires AWG 20 (2 line + earth), length as per table.

► ENCAPSULATION MATERIALS

PET (polyethylene terephthalate) fiberglass reinforced; black colour.

► TECHNICAL FEATURES

<i>Continuous duty</i>	ED 100%
<i>Insulation class</i>	F (140°C)
<i>Ambient temperature</i>	-10°C +60°C
<i>Protection degree</i>	IP 66 (EN 60529)
<i>Voltages</i>	DC 12-24V (+10% -5%)
	AC 24V/50Hz - 110V/50Hz (120V/60Hz) - 230V/50Hz (+10% -15%)
	(Other voltages and frequencies on request).

TYPE	POWER ABSORPTION			CABLE FREE LENGTH L	HOLES		NOTES	WEIGHT (kg)
	AC (VA)		DC (W)		ØA	ØB		
	Inrush	Holding						
Z535A	23	14	9	400	10,7	12.35	-	0,205
Z535Y				1250				0,235

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST.

09091606

