




COIL

Spade terminal (DIN 46340)

ZE30

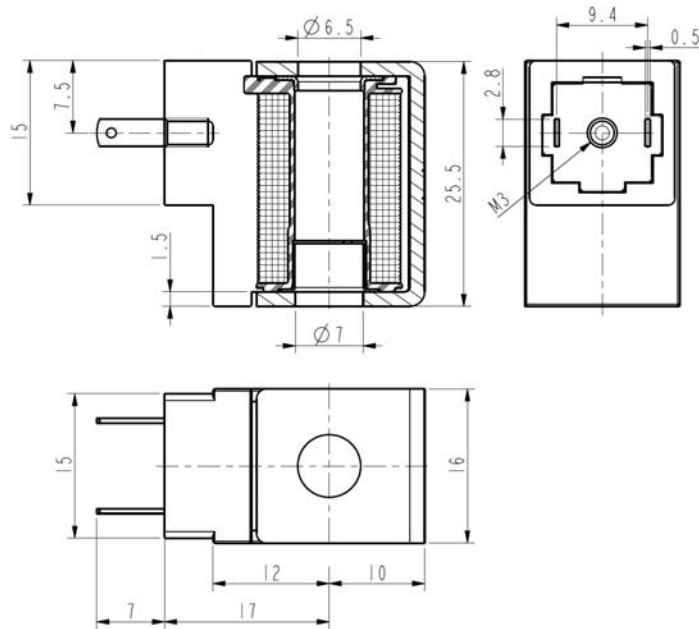

► GENERAL FEATURES

Complying with 2014/35/EU (LVD) directive.
Zinc plated external steel yoke.
Product in accordance with the RoHS 2 directive.
100% inspected.

► ELECTRIC CONNECTION

2 silver-plated spade terminals 2,8 x 0,5 (DIN 46340).
Micro plug connector.

► ENCAPSULATION MATERIALS

PA (polyamide) fiberglass reinforced; black colour

► TECHNICAL FEATURES

Duty

ZE30A – ZE30C – ZE30L: ED 100%
ZE30F – ZE30H: ED according to use

Coil insulation class

F (155°C)

Ambient temperature

-10°C +60°C

Protection degree

IP 65 (EN 60529) with micro plug connector

Voltages

DC

12-24V (+10% -5%)

(Other voltages on request)

TYPE	POWER ABSORPTION			HOLES		NOTES	WEIGHT (kg)
	AC (VA)		D+C (W)				
	Inrush	Holding		ØA	ØB		
ZE30A	-	-	4	6,5	7,2	-	0,030
ZE30C			2,5				
ZE30F			6				
ZE30H			8				
ZE30L			0,5				

► NOTES

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST

1606/1702